

www.hypneu.ir


09126730171

کاتالوگ پمپ دیافراگمی با جنس بدنه آلومینیوم AL

سایز 1/2 اینچ

PK 05(1/2") METALIC DIAPHRAGM PUMPS

Flow Rate	56 lt/min
Pump Size Inlet-Outlet	3/4"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	6 m
Liquit Temp. Limit	-18 / 85 °C
Air Inlet	1/4"
Solid Handling Capability	3 mm
VVeight	5.8 kg

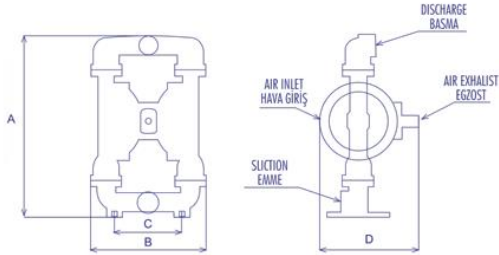

MODEL PK 05	A	B	C	D
ÖLCÜLER DIMENSIONS (mm)	282	264	163	212



The air operated diaphragm pumps run by compressed air and are used for transferring industrial liquid. High viscosity, corrosive and abrasive liquids can be transferred by the diaphragm pumps. The diaphragm pumps allow to pass varying sizes and types of solid particles. The pumps are completely ex-proof because there is no electrical motor.

FEATURES

- Dry self-priming
- Variable flowrate
- Solid handling capability
- High and low viscous
- No electrical components to spark
- ATEX Certificate
- Run dry without damage

APPLICATIONS


- Paint
- Chemical Liquid
- Marine
- Glue
- Solvents
- Cosmetic Liquid
- Food



WETTED PARTS
Aluminum




DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

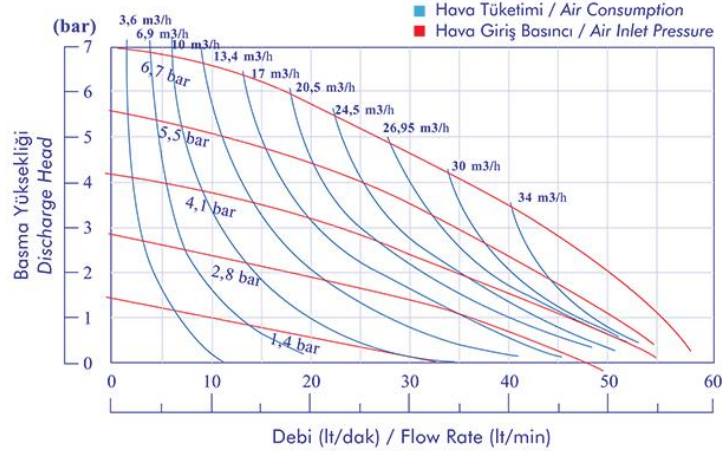

سایز 1 اینچ

PK 10(1") METALIC DIAPHRAGM PUMPS

Flow Rate	155 lt/min
Pump Size Inlet-Outlet	1"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	6 m
Liquit Temp. Limit	-18 / 85 °C
Air Inlet	1/2"
Solid Handling Capability	4 mm
VWeight	11 kg

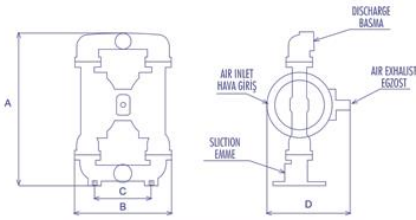

MODEL PK 10	A	B	C	D
ÖLCÜLER DIMENSIONS (mm)	370	267	150	295



The air operated diaphragm pumps run by compressed air and are used for transferring industrial liquid. High viscosity, corrosive and abrasive liquids can be transferred by the diaphragm pumps. The diaphragm pumps allow to pass varying sizes and types of solid particles. The pumps are completely ex-proof because there is no electrical motor.

FEATURES

- Dry self-priming
- Variable flowrate
- Solid handling capability
- High and low viscous
- No electrical components to spark
- ATEX Certificate
- Run dry without damage

APPLICATIONS


- Paint
- Chemical Liquid
- Marine
- Glue
- Solvents
- Cosmetic Liquid
- Food
- Asit ve Alkoller
- Gıda Maddeleri



WETTED PARTS
Aluminum, Cast Iron




DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

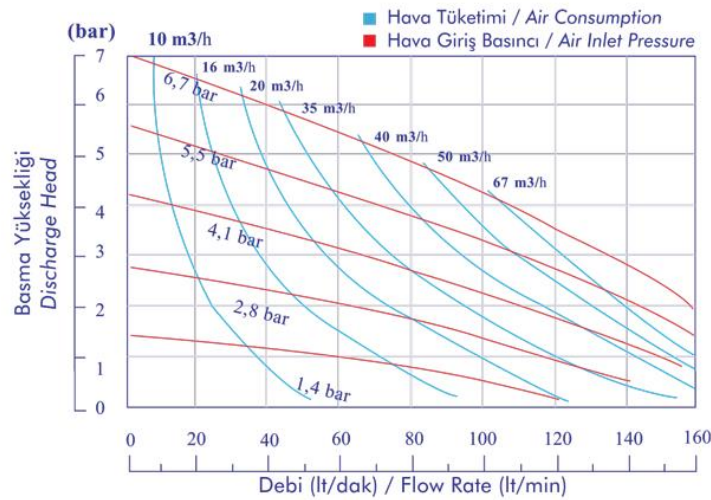

سایز 1 1/2 اینچ

PK 15(11/2") METALIC DIAPHRAGM PUMPS

Flow Rate	395 lt/min
Pump Size Inlet-Outlet	11/2"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	6 m
Liquid Temp. Limit	-18 / 85 °C
Air Inlet	3/4"
Solid Handling Capability	6 mm
Weight	26 kg

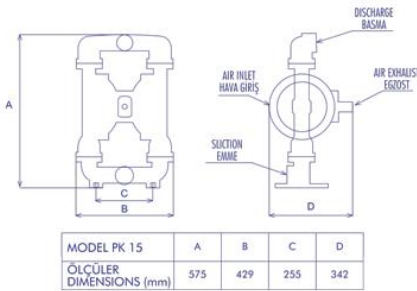

The air operated diaphragm pumps run by compressed air and are used for transferring industrial liquid. High viscosity, corrosive and abrasive liquids can be transferred by the diaphragm pumps. The diaphragm pumps allow to pass varying sizes and types of solid particles. The pumps are completely ex-proof because there is no electrical motor.

FEATURES

- Dry self-priming
- Variable flowrate
- Solid handling capability
- High and low viscous
- No electrical components to spark
- ATEX Certificate
- Run dry without damage

APPLICATIONS


- Paint
- Chemical Liquid
- Marine
- Glue
- Solvents
- Cosmetic Liquid
- Food



WETTED PARTS
Aluminum, Cast Iron




DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

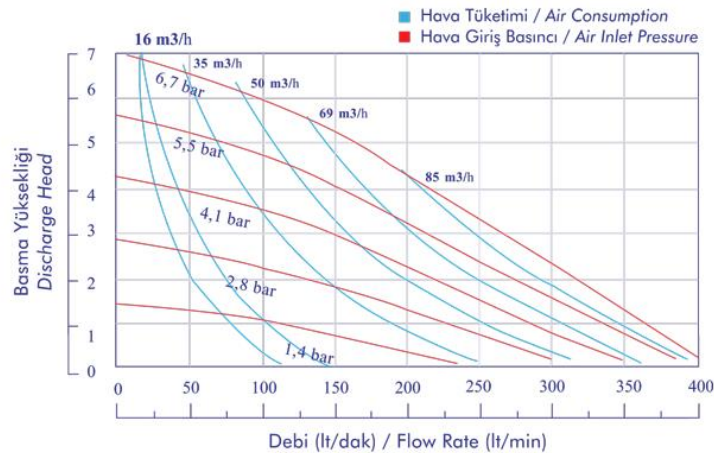

سایز 2 اینچ

PK 20(2") METALIC DIAPHRAGM PUMPS

Flow Rate	555 lt/min
Pump Size Inlet-Outlet	2"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	6 m
Liquit Temp. Limit	-18 / 85 °C
Air Inlet	3/4"
Solid Handling Capability	6 mm
VVweight	32 kg

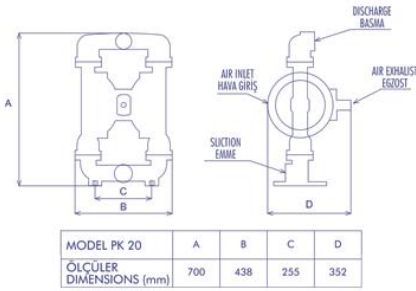

The air operated diaphragm pumps run by compressed air and are used for transferring industrial liquid. High viscosity, corrosive and abrasive liquids can be transferred by the diaphragm pumps. The diaphragm pumps allow to pass varying sizes and types of solid particles. The pumps are completely ex-proof because there is no electrical motor.

FEATURES

Dry self-priming
Variable flowrate
Solid handling capability
High and low viscous
No electrical components to spark
ATEX Certificate
Run dry without damage

APPLICATIONS


Paint
Chemical Liquid
Marine
Glue
Solvents
Cosmetic Liquid
Food
Asit ve Alkoller
Gıda Maddeleri



WETTED PARTS
Aluminum, Cast Iron




DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

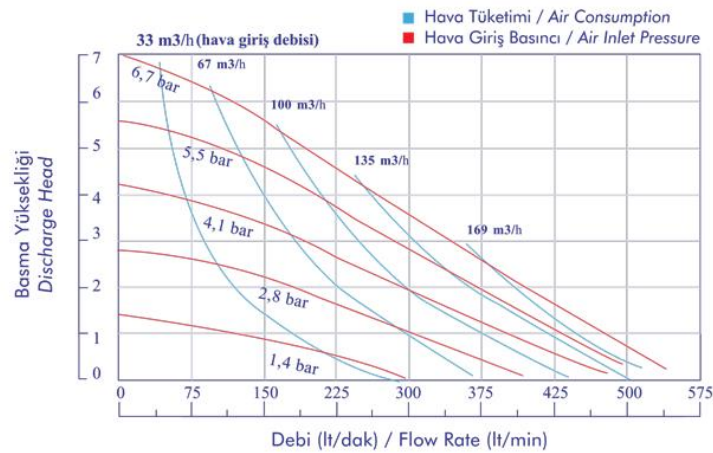

سایز 3 اینچ

PK 30(3") METALLIC DIAPHRAGM PUMPS

Flow Rate	880 lt/min
Pump Size Inlet-Outlet	3"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	6 m
Liquid Temp. Limit	-18 / 85 °C
Air Inlet	3/4"
Solid Handling Capability	8 mm
Weight	51 kg

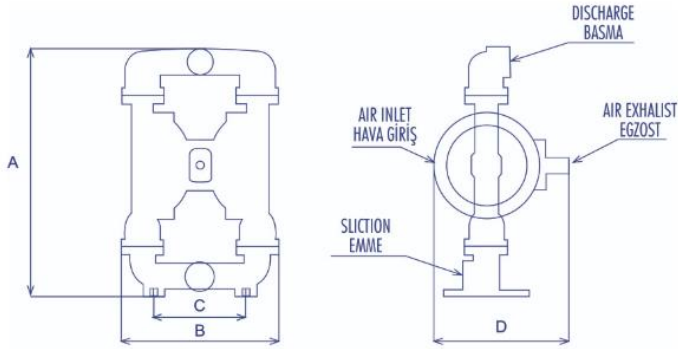

MODEL PK 30	A	B	C	D
ÖLÇÜLER DIMENSIONS (mm)	860	512	300	403



Kompresörden gelen basınçlı hava ile çalışan diyaframlı pompalar, endüstriyel akışkanların transferinde kullanılmaktadır. Yüksek viskoziteli sıvılar ve içinde katı partikül (pompanın izin verdiği büyüklükte) olan akışkanlar rahatlıkla çift diyaframlı pompalar ile transfer edilebilmektedir. Diyaframlı pompa üzerinde elektrik motoru olmadığından Ex-Proof özelliğe sahip olup, ATEX sertifikalıdır.

FEATURES
Dry self-priming
Variable flowrate
Solid handling capability
High and low viscous
No electrical components to spark
ATEX Certificate
Run dry without damage

APPLICATIONS
Paint
Chemical Liquid
Marine
Glue
Solvents
Cosmetic Liquid
Food



VVETTED PARTS
Aluminum, Cast Iron



DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

