

www.hypneu.ir


09126730171

کاتالوگ پمپ دیافراگمی با جنس بدنه پلی پروپیلن PP

سایز 1/4 اینچ

PK 01(1/4") NON-METALIC DIAPHRAGM PUMPS

Flow Rate	15 lt/min
Pump Size Inlet-Outlet	1/4"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	1.5 m
Liquid Temp. Limit	-18 / 85 °C
Air Inlet	1/4"
Solid Handling Capability	1.5 mm
Weight	1.2 kg

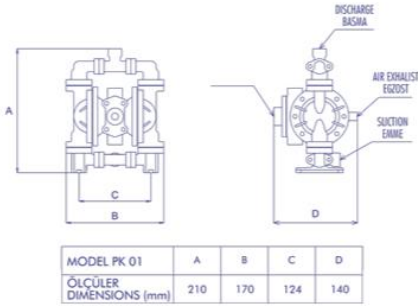

The air operated diaphragm pumps run by compressed air and are used for transferring industrial liquid. High viscosity, corrosive and abrasive liquids can be transferred by the diaphragm pumps. The diaphragm pumps allow to pass varying sizes and types of solid particles. The pumps are completely ex-proof because there is no electrical motor.

FEATURES
Dry self-priming
Variable flowrate
Solid handling capability
High and low viscous
No electrical components to spark
ATEX Certificate
Run dry without damage


APPLICATIONS
Paint
Chemical Liquid
Marine
Glue
Solvents
Cosmetic Liquid
Food



WETTED PARTS
Polipropilen (PP)




DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

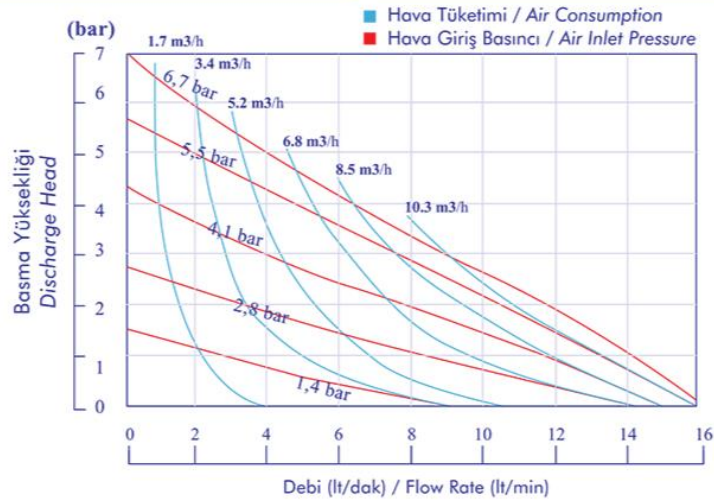

سایز 1/2 اینچ

PK 05(1/2") NON-METALIC DIAPHRAGM PUMPS

Flow Rate	56 lt/min
Pump Size Inlet-Outlet	3/4"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	6 m
Liquid Temp. Limit	-18 / 85 °C
Air Inlet	1/4"
Solid Handling Capability	3 mm
Weight	5 kg

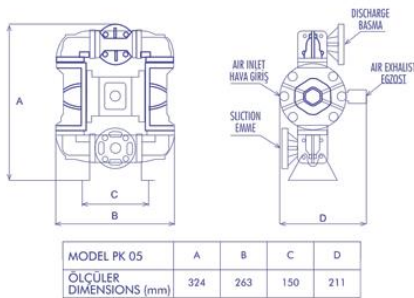

The air operated diaphragm pumps run by compressed air and are used for transferring industrial liquid. High viscosity, corrosive and abrasive liquids can be transferred by the diaphragm pumps. The diaphragm pumps allow to pass varying sizes and types of solid particles. The pumps are completely ex-proof because there is no electrical motor.

FEATURES

- Dry self-priming
- Variable flowrate
- Solid handling capability
- High and low viscous
- No electrical components to spark
- ATEX Certificate
- Run dry without damage

APPLICATIONS


- Paint
- Chemical Liquid
- Marine
- Glue
- Solvents
- Cosmetic Liquid
- Food



WETTED PARTS
Polipropilen (PP)




DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

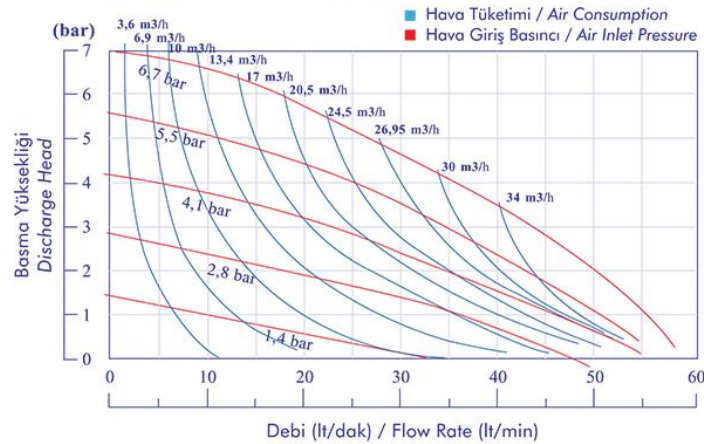

سایز 1 اینچ

PK 10(1") NON-METALIC DIAPHRAGM PUMPS

Flow Rate	155 lt/min
Pump Size Inlet-Outlet	1"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	6 m
Liquit Temp. Limit	-18 / 85 °C
Air Inlet	1/4"
Solid Handling Capability	4 mm
Weight	10 kg

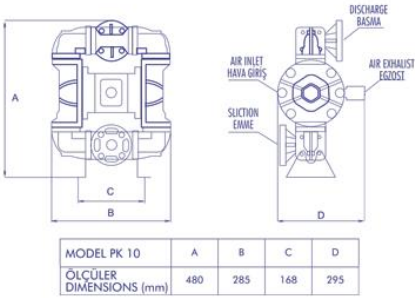

The air operated diaphragm pumps run by compressed air and are used for transferring industrial liquid. High viscosity, corrosive and abrasive liquids can be transferred by the diaphragm pumps. The diaphragm pumps allow to pass varying sizes and types of solid particles. The pumps are completely ex-proof because there is no electrical motor.

FEATURES
Dry self-priming
Variable flowrate
Solid handling capability
High and low viscous
No electrical components to spark
ATEX Certificate
Run dry without damage


APPLICATIONS
Paint
Chemical Liquid
Marine
Glue
Solvents
Cosmetic Liquid
Food



WETTED PARTS
Polipropilen (PP)




DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

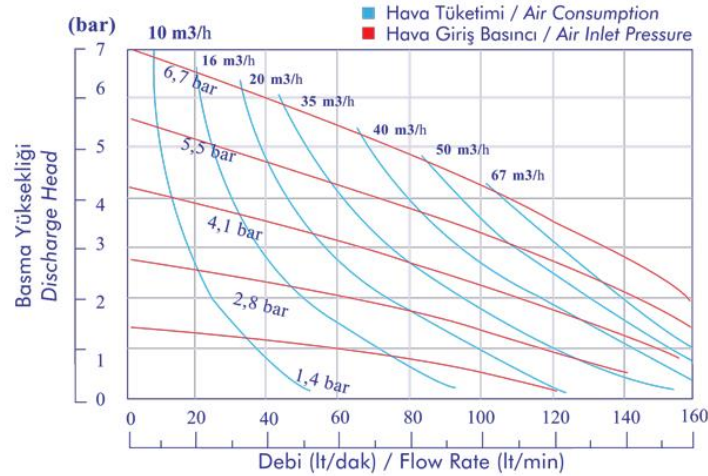

سایز 1 1/2 اینچ

PK 15(1 1/2") NON-METALIC DIAPHRAGM PUMPS

Flow Rate	395 lt/min
Pump Size Inlet-Outlet	1 1/2"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	6 m
Liquid Temp. Limit	-18 / 85 °C
Air Inlet	3/4"
Solid Handling Capability	6 mm
Weight	18 kg

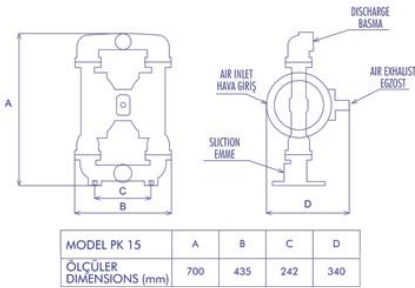

The air operated diaphragm pumps run by compressed air and are used for transferring industrial liquid. High viscosity, corrosive and abrasive liquids can be transferred by the diaphragm pumps. The diaphragm pumps allow to pass varying sizes and types of solid particles. The pumps are completely ex-proof because there is no electrical motor.


FEATURES	APPLICATIONS
Dry self-priming	Paint
Variable flowrate	Chemical Liquid
Solid handling capability	Marine
High and low viscous	Glue
No electrical components to spark	Solvents
ATEX Certificate	Cosmetic Liquid
Run dry without damage	Food



WETTED PARTS
Polipropilen (PP)




DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

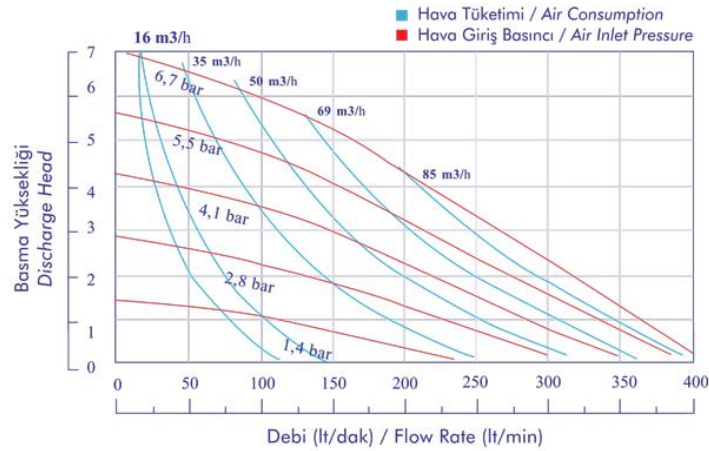

سایز 2 اینچ

PK 20(2") NON-METALIC DIAPHRAGM PUMPS

Flow Rate	555 lt/min
Pump Size Inlet-Outlet	2"
Max. Discharge Pressure	7 bar
Max. Discharge Head	70 m
Suction Depth	6 m
Liquid Temp. Limit	-18 / 85 °C
Air Inlet	3/4"
Solid Handling Capability	6 mm
Weight	25 kg

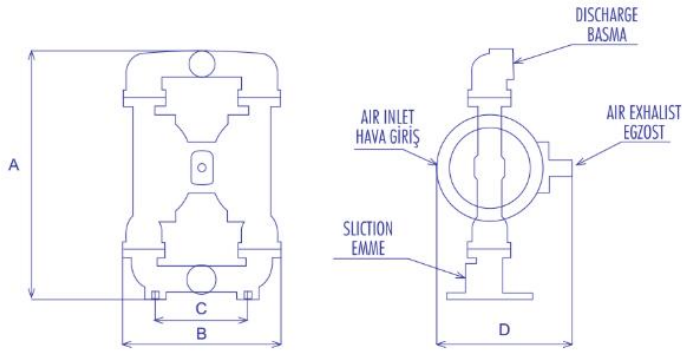

MODEL PK 30	A	B	C	D
ÖLÇÜLER DIMENSIONS (mm)	860	512	300	403

The air operated diaphragm pumps run by compressed air and are used for transferring industrial liquid. High viscosity, corrosive and abrasive liquids can be transferred by the diaphragm pumps. The diaphragm pumps allow to pass varying sizes and types of solid particles. The pumps are completely ex-proof because there is no electrical motor.

FEATURES

- Dry self-priming
- Variable flow rate
- Solid handling capability
- High and low viscous
- No electrical components to spark
- ATEX Certificate
- Run dry without damage

APPLICATIONS

- Paint
- Chemical Liquid
- Marine
- Glue
- Solvents
- Cosmetic Liquid
- Food



WETTED PARTS
Aluminyum, Dökme Demir



DIAPHRAGMS
Neopren, Buna-N, Teflon, EPDM, Viton, Santoprene

